





CAMPBELL SECURITY SCREEN PROTECTIVE SECURITY DOOR

CUSTOM DOOR (HEIGHT) GUIDELINES:
 SLIDING & HINGED DOORS = 27.56" RECOMMENDED MIN HEIGHT
 SLIDING & HINGED DOORS = 124" RECOMMENDED MAX HEIGHT
CUSTOM DOOR (WIDTH) GUIDELINES:
 SLIDING & HINGED DOORS = 11.81" RECOMMENDED MIN WIDTH
 SLIDING & HINGED DOORS = 60" RECOMMENDED MAX WIDTH

OPTIONS:
 DOOR HANDLE AT 44" - TYPICAL (< 44" WILL BE CHARGED EXTRA)
 MID-RAIL OPTIONS - VERTICAL AND HORIZONTAL (DETAIL A/2.05)
 INSIDE LEVEL OPERATED LOCK
 SURROUND FRAME OPTION (DETAIL 14/2.03)


- COLOR OPTIONS:**
- WHITE
 - BLACK
 - BROWN
 - SAHARA BROWN
 - LIGHT GRAY
 - SILVER
 - ALMOND
 - BRONZE
 - SAHARA GRAY
 - CUSTOM

STRUCTURAL DISCLAIMER:
 ALL CUSTOMERS WHO IN ANY WAY UTILIZE THIS PRODUCT ARE SOLELY RESPONSIBLE TO CONSULT A STRUCTURAL ENGINEER TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND SITE CONDITIONS. ALL INSTALLERS MUST BE QUALIFIED AND HAVE PROFESSIONAL KNOWLEDGE ABOUT COMPLIANCE WITH LOCAL, STATE AND FEDERAL REGULATIONS, SAFETY FACTORS, AND THE APPROPRIATE CHOICE OF FIXING MATERIAL AND PROCEDURES.

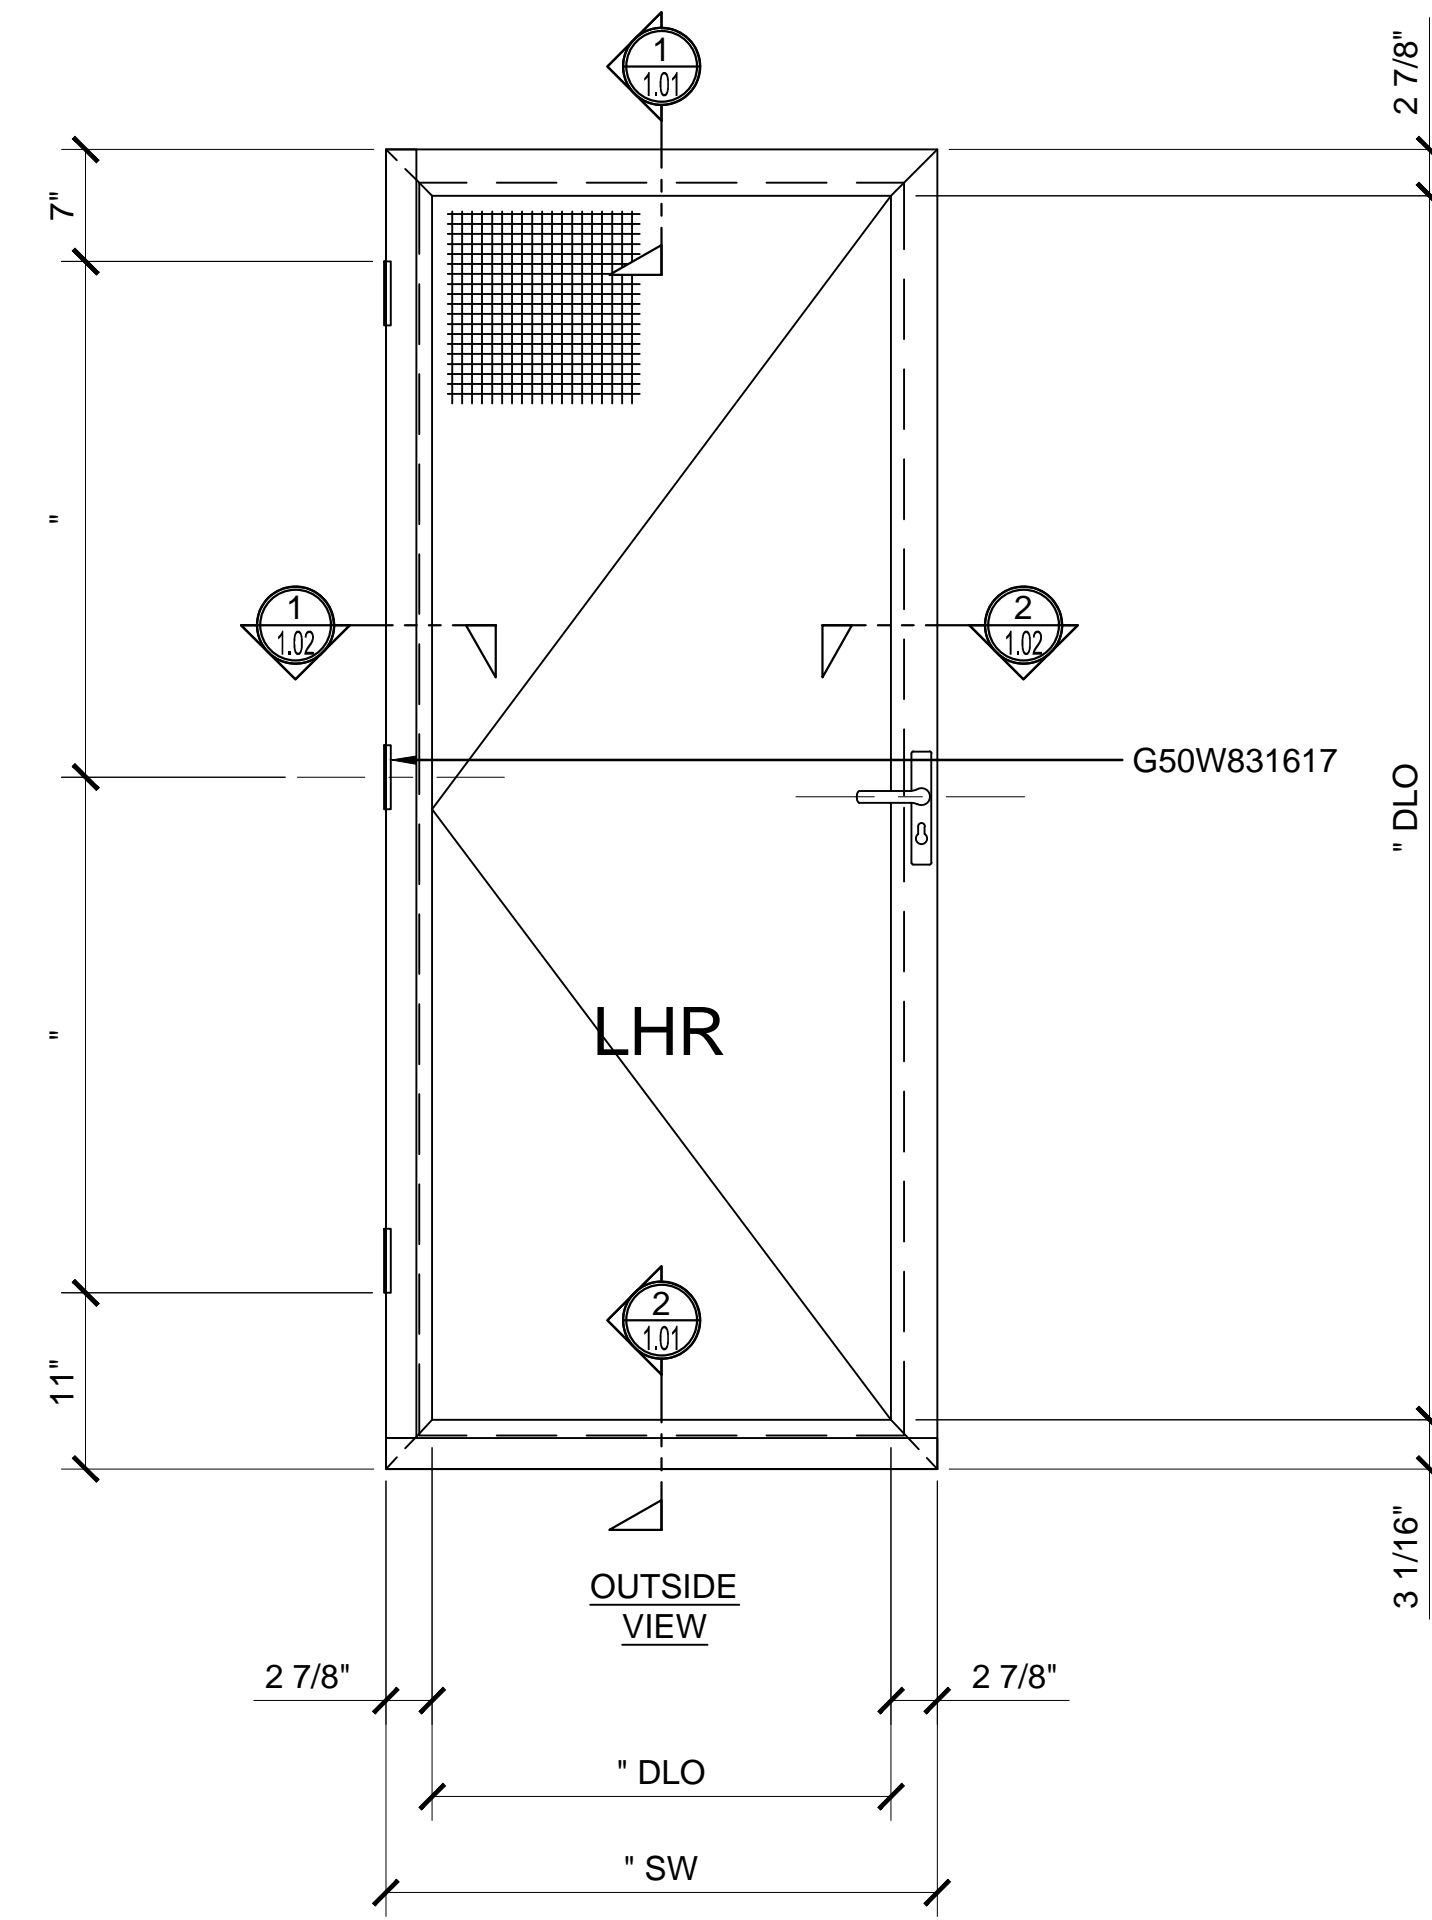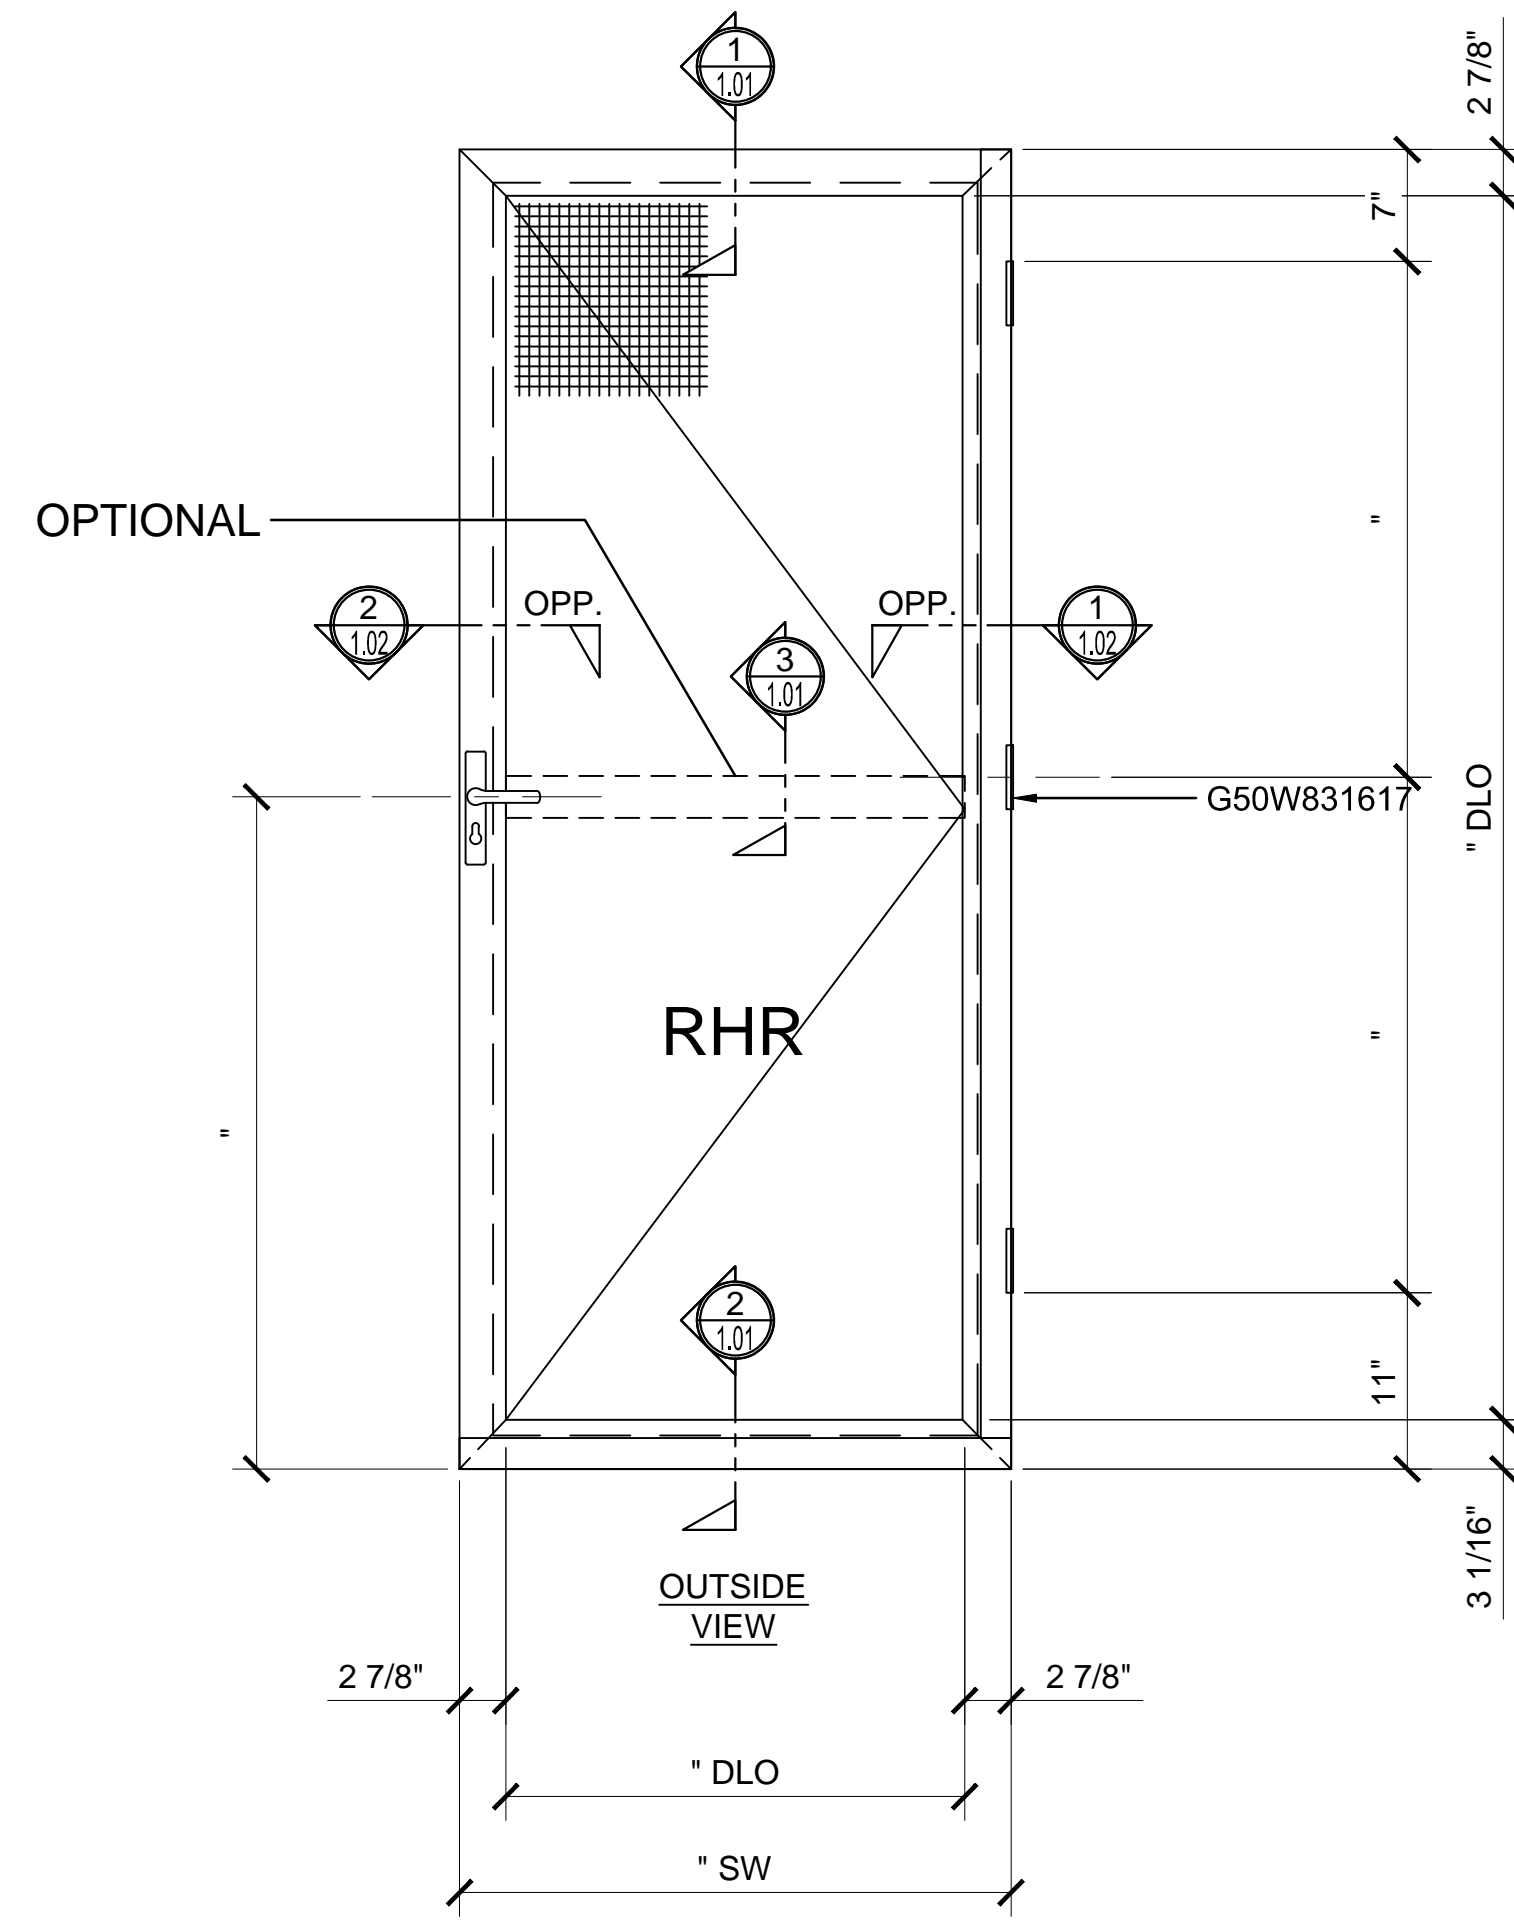

PIVOT DOOR (SHOWN RHR & LHR SWING)


DOOR SWING CHART

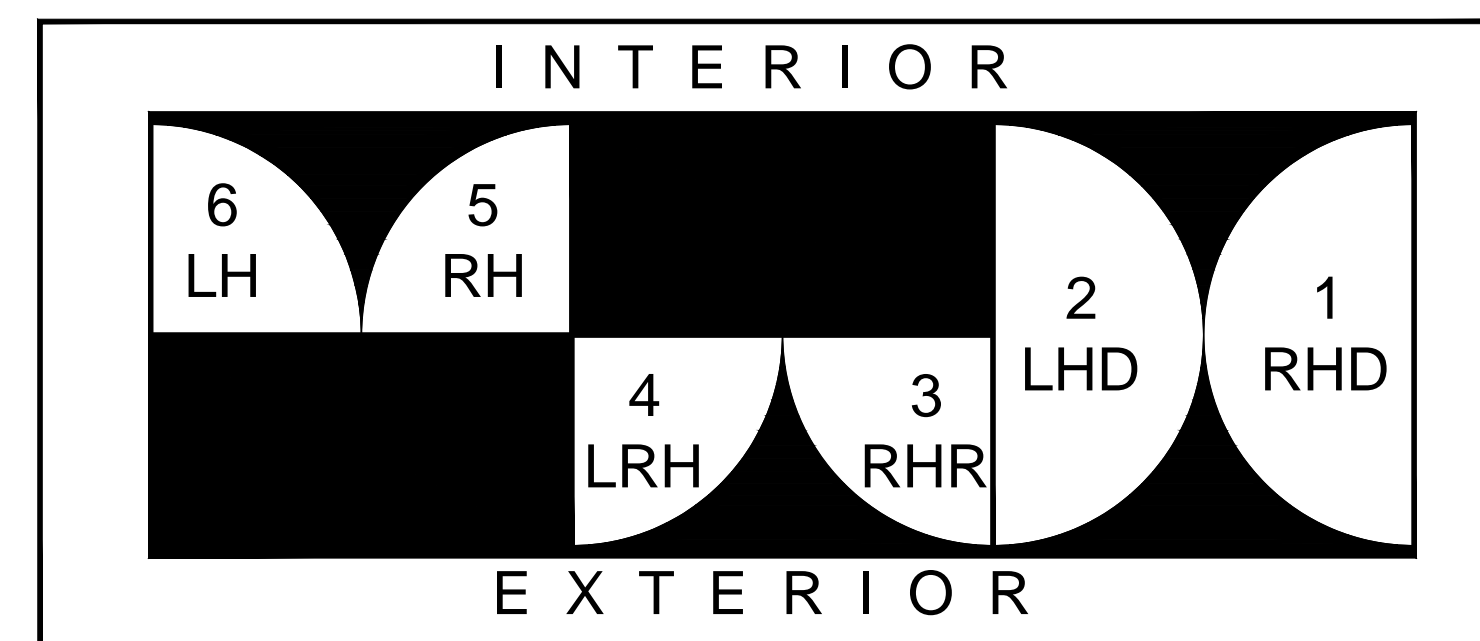

"INDUSTRY STANDARD" DOOR STYLES AND SWINGING DOOR PATTERNS


THERE ARE THREE BASIC DOOR STYLES TYPICALLY REFERRED TO THROUGHOUT THE INDUSTRY APPLICABLE TO THE CAMPBELL SECURITY SCREEN PROTECTIVE SECURITY SCREEN DOOR SYSTEMS. BY IDENTIFYING YOUR BASIC DOOR STYLE AND SWING, IT WILL HELP MAKE CLEAR WHAT YOUR INTENTIONS ARE FOR THE PARTICULAR PROJECT. FOR MORE INFORMATION PLEASE CONTACT US AT (800) 580-9997 OR FAX US AT (714) 375-7131.



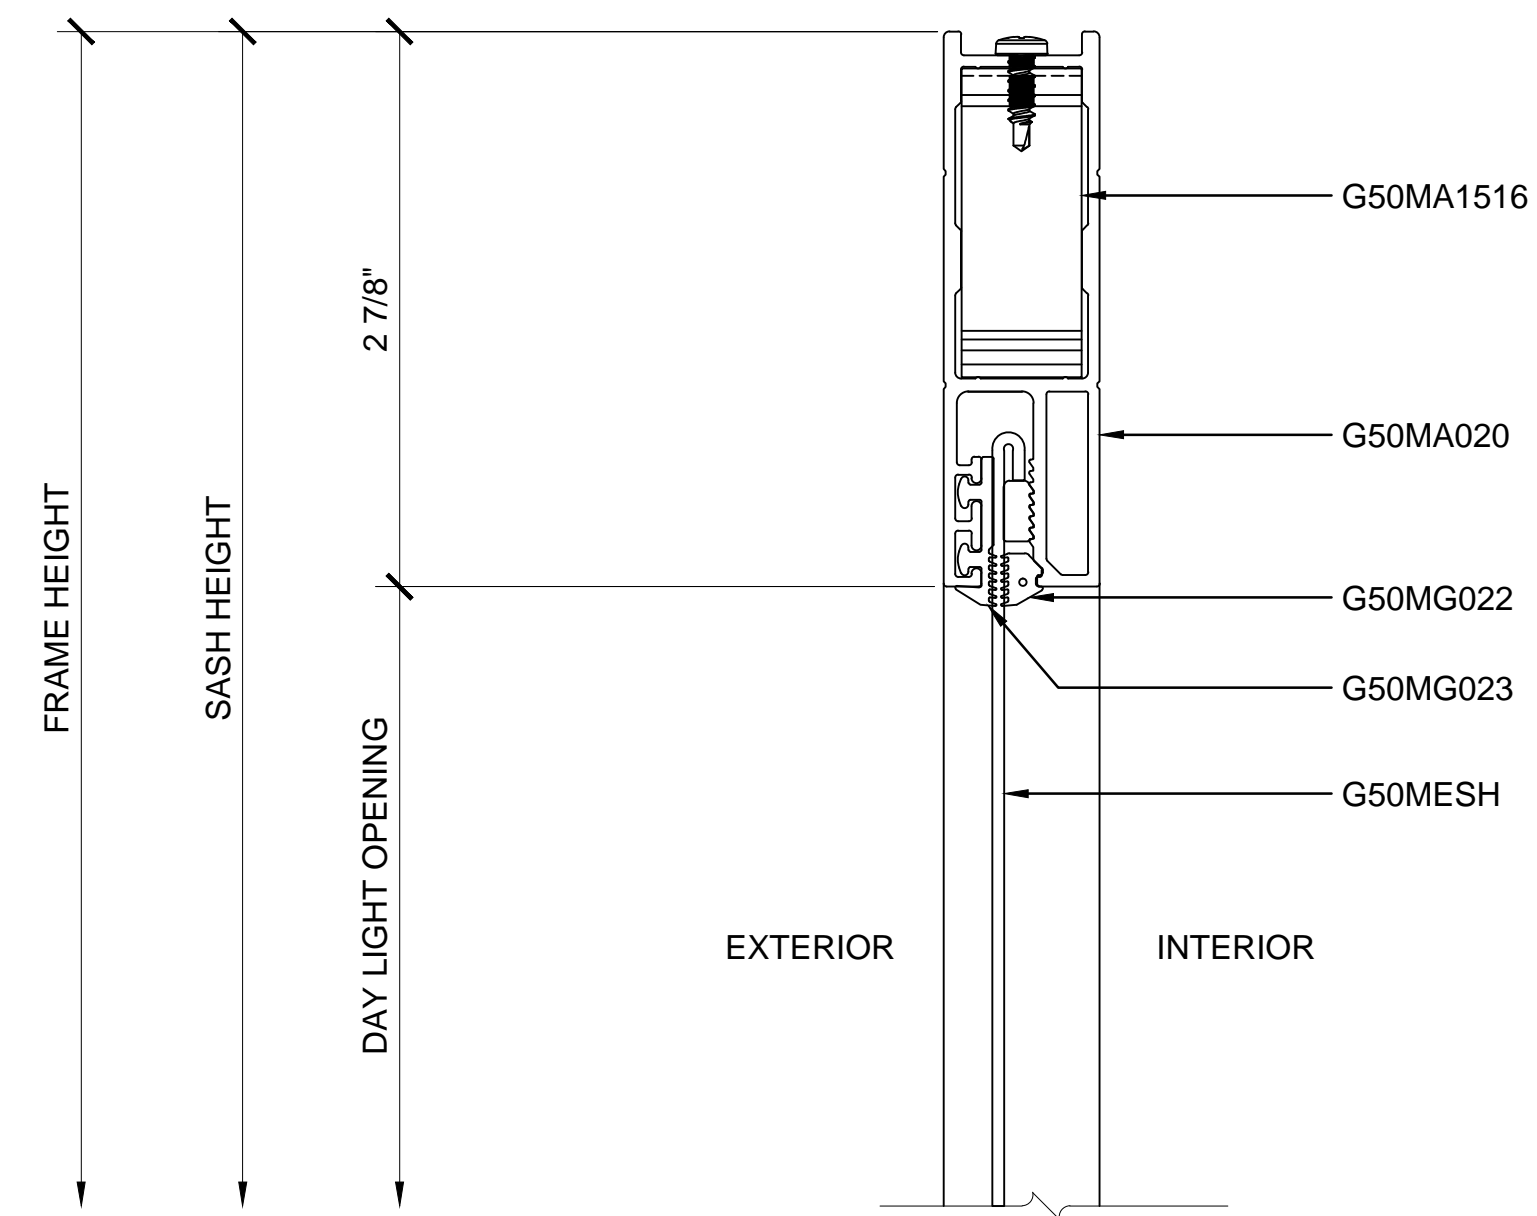


① SECTION DETAIL AT HEAD

ARCH REF: N/A 1'-0"=1'-0"

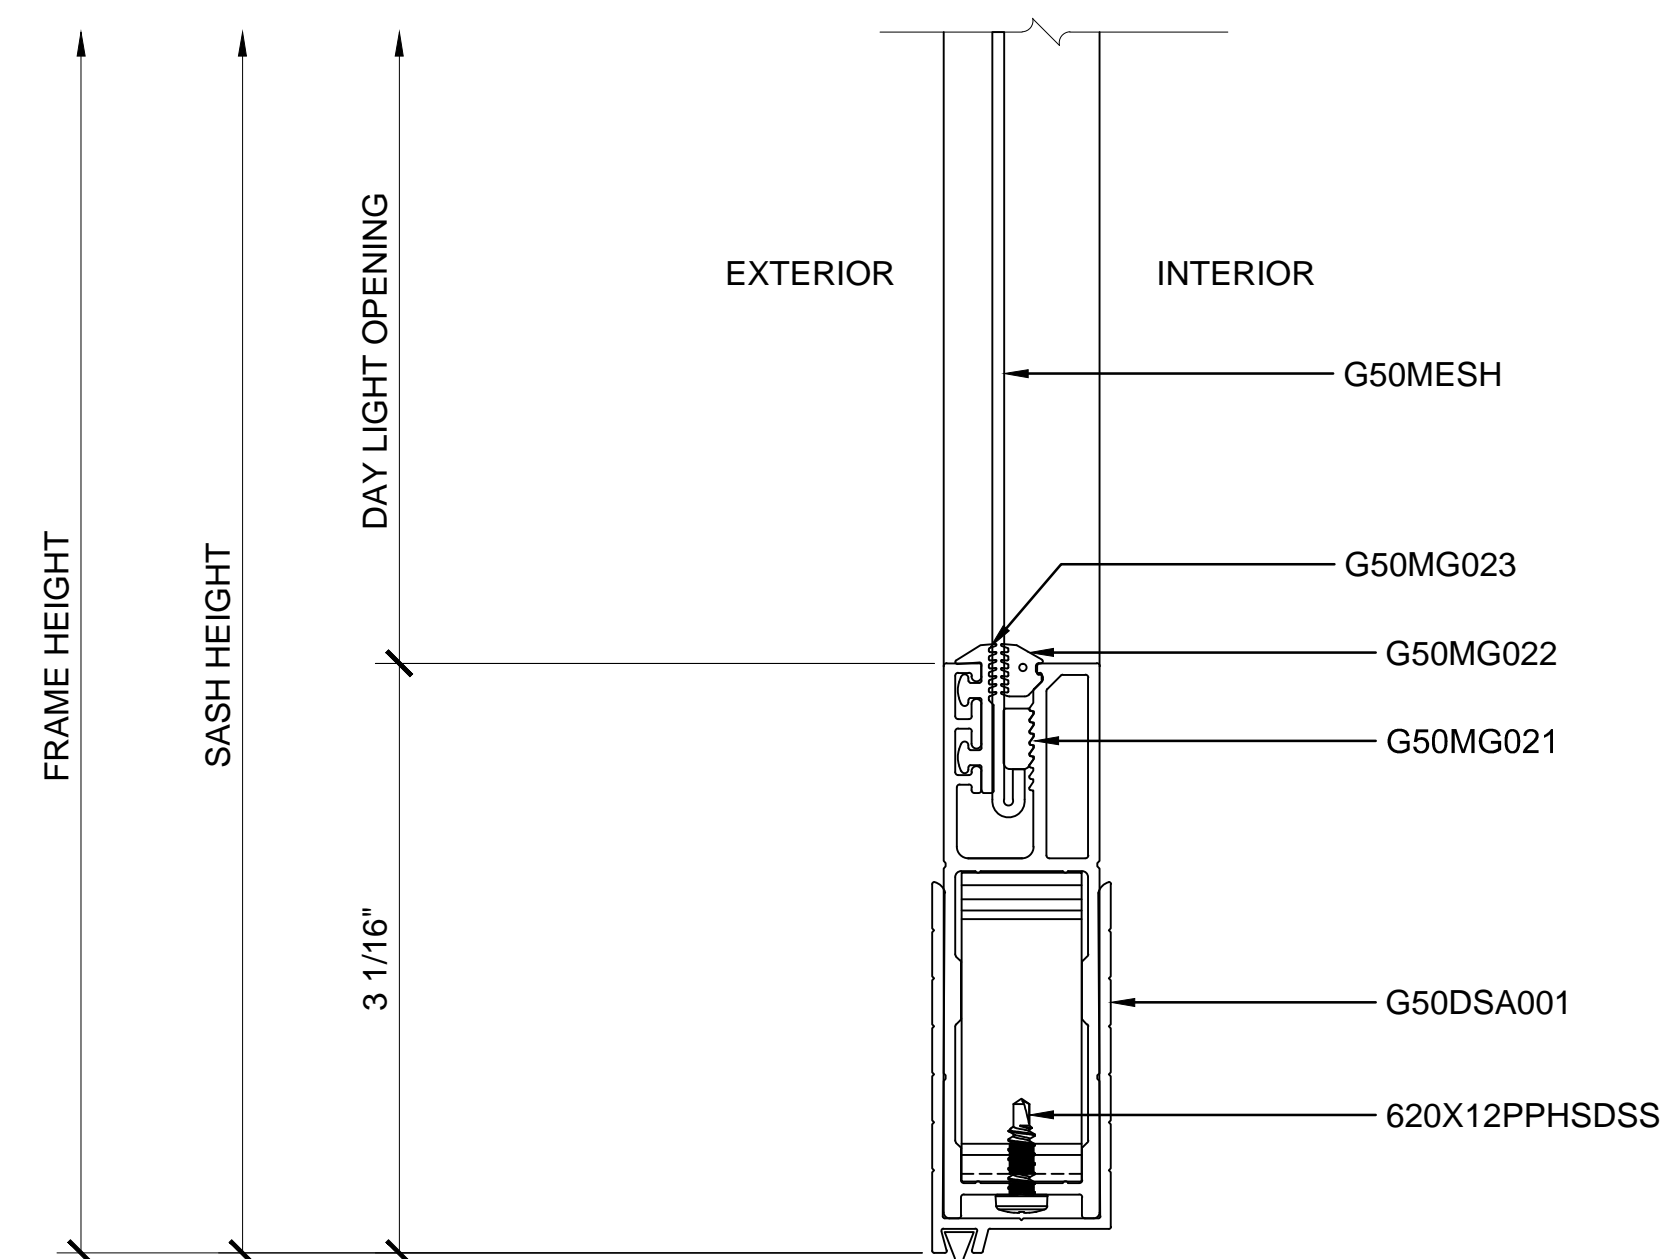


② SECTION DETAIL AT SILL

ARCH REF: N/A 1'-0"=1'-0"

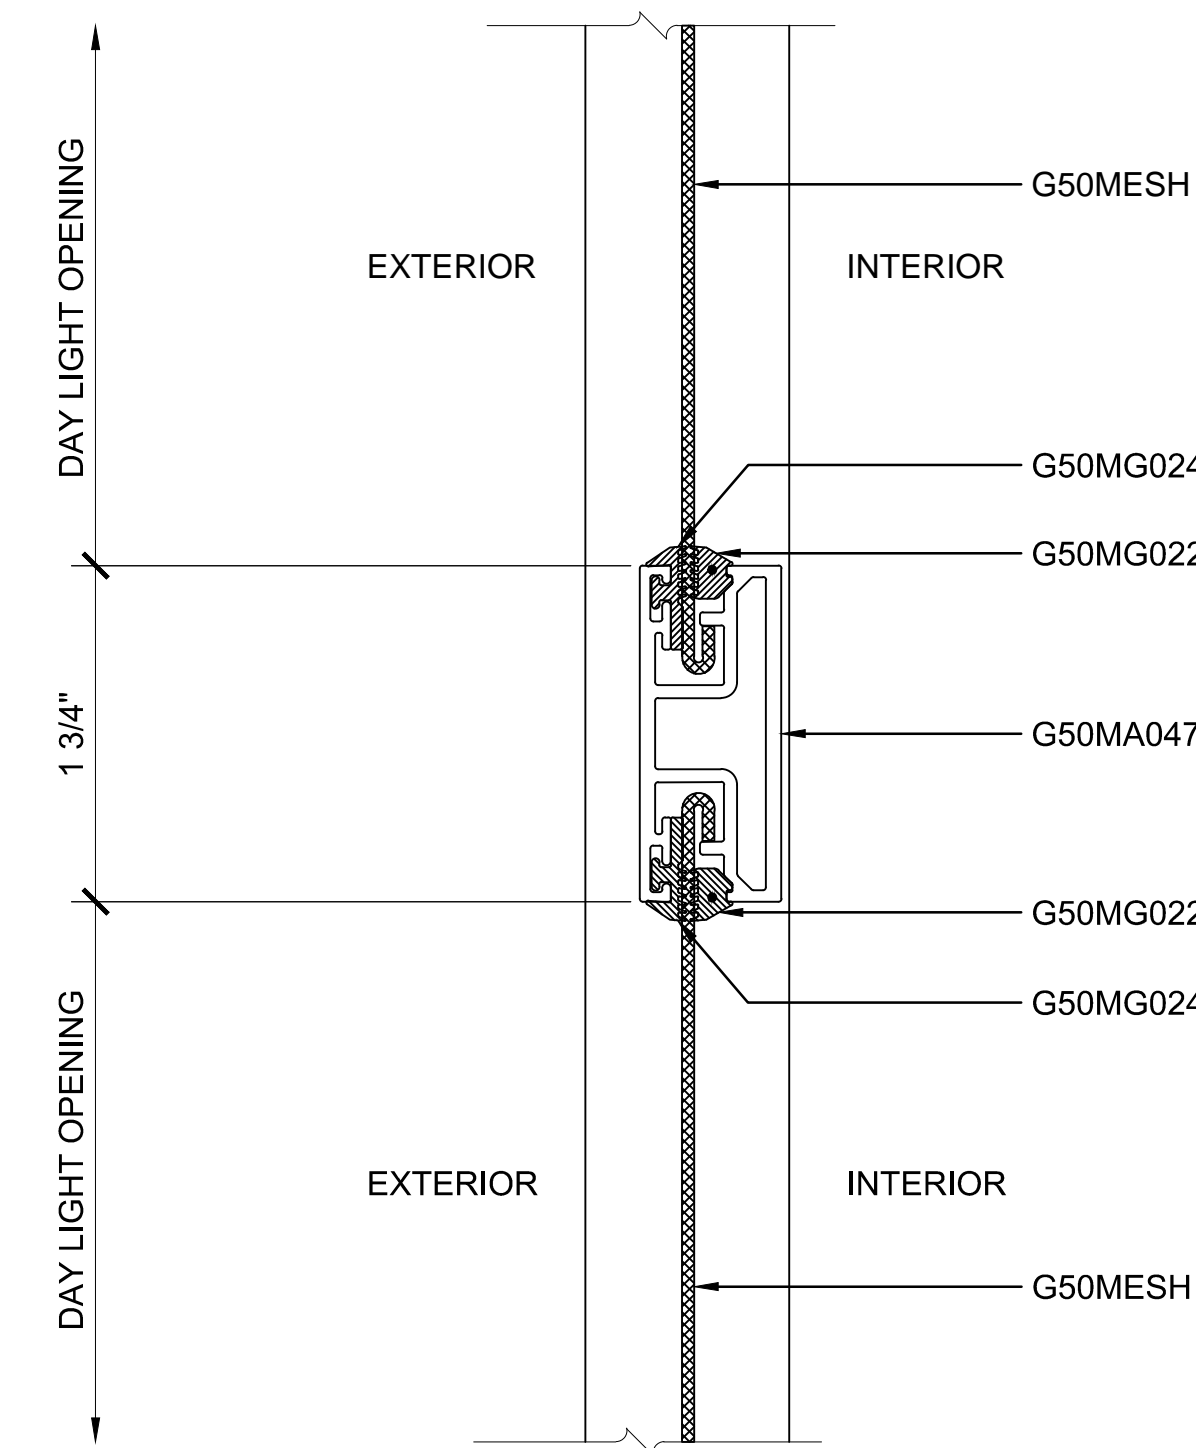

③ SECTION DETAIL AT MIDRAIL - OPTIONAL


ARCH REF: N/A 1'-0"=1'-0"

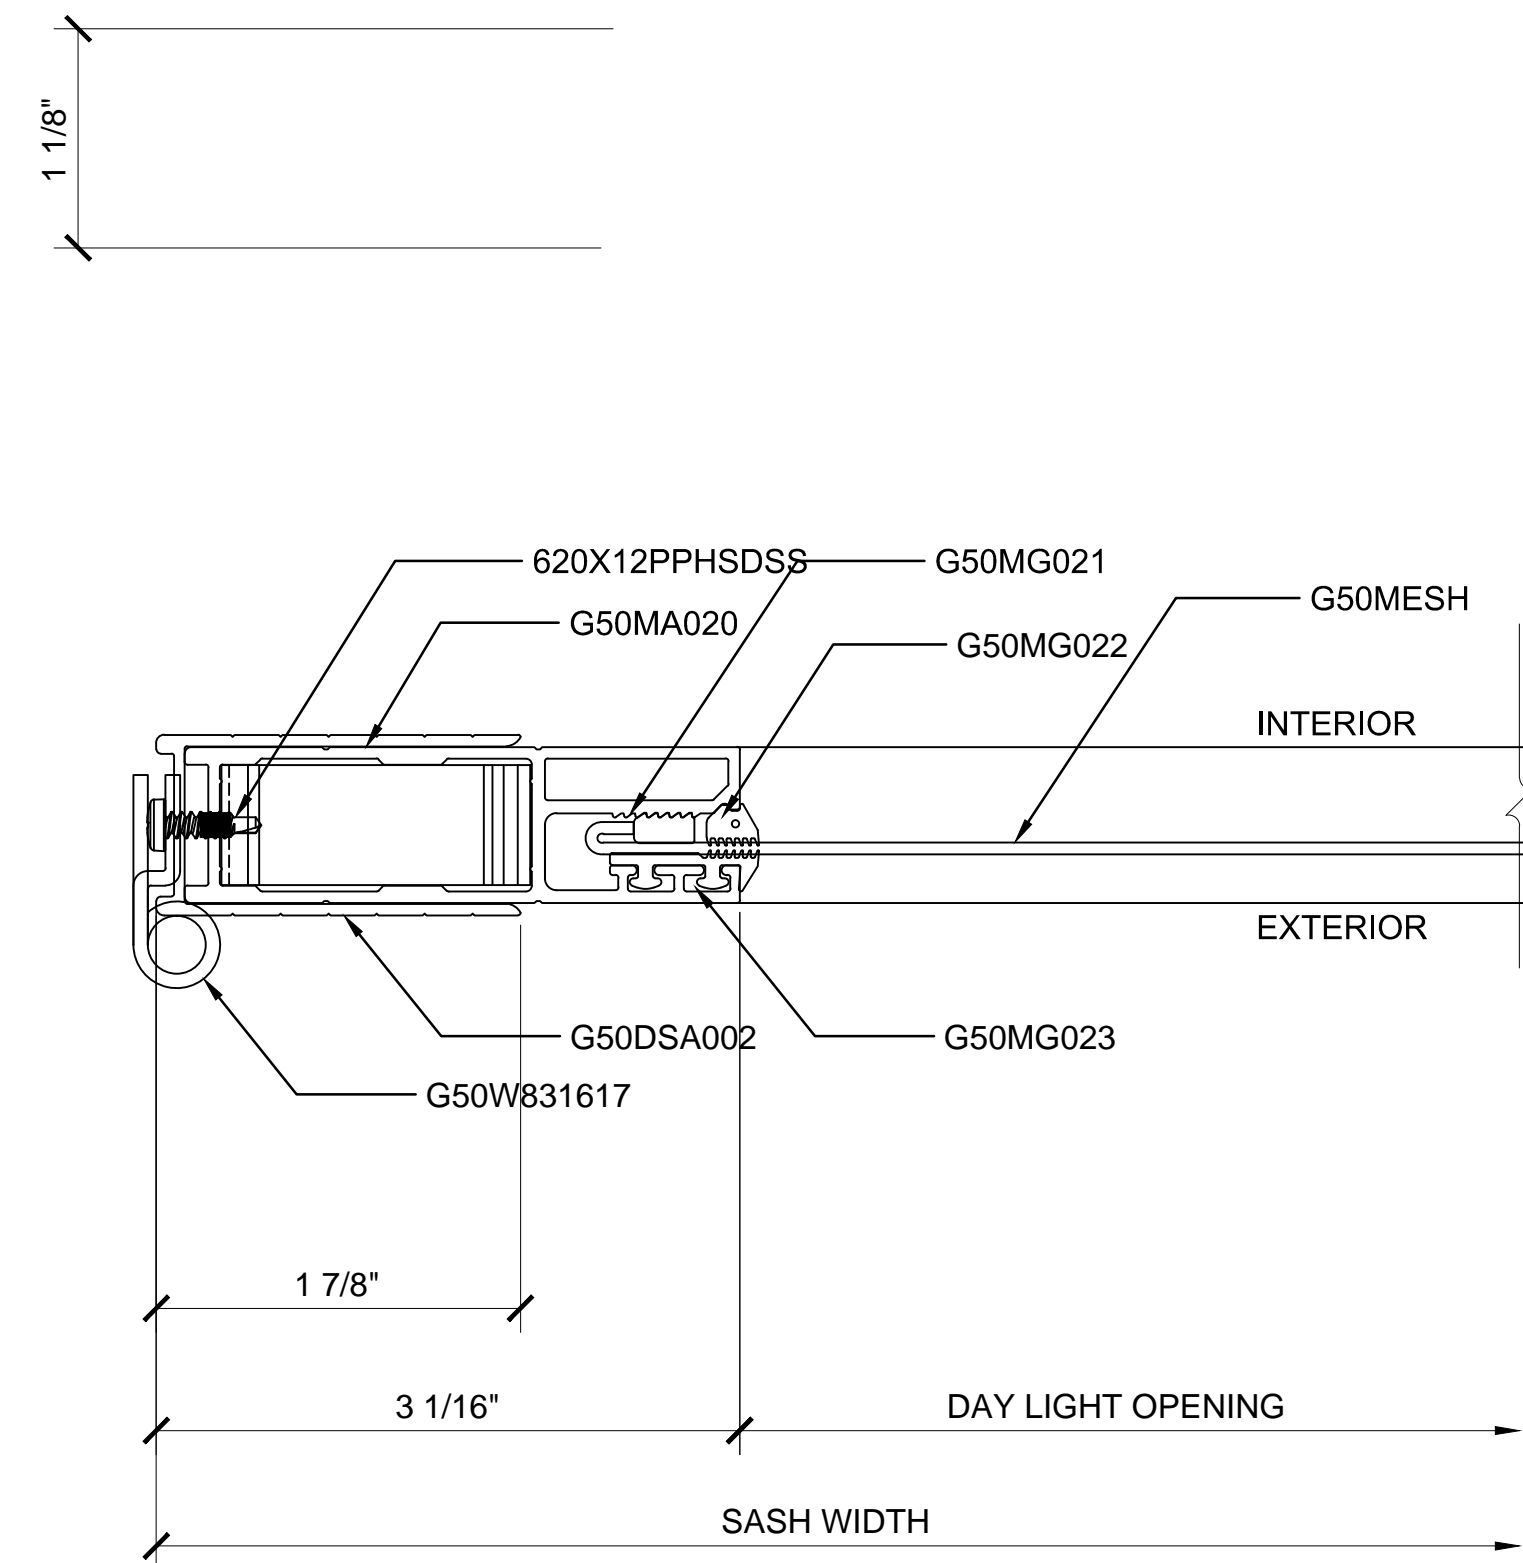

① SECTION DETAIL AT JAMB

ARCH REF: N/A

1'-0"=1'-0"

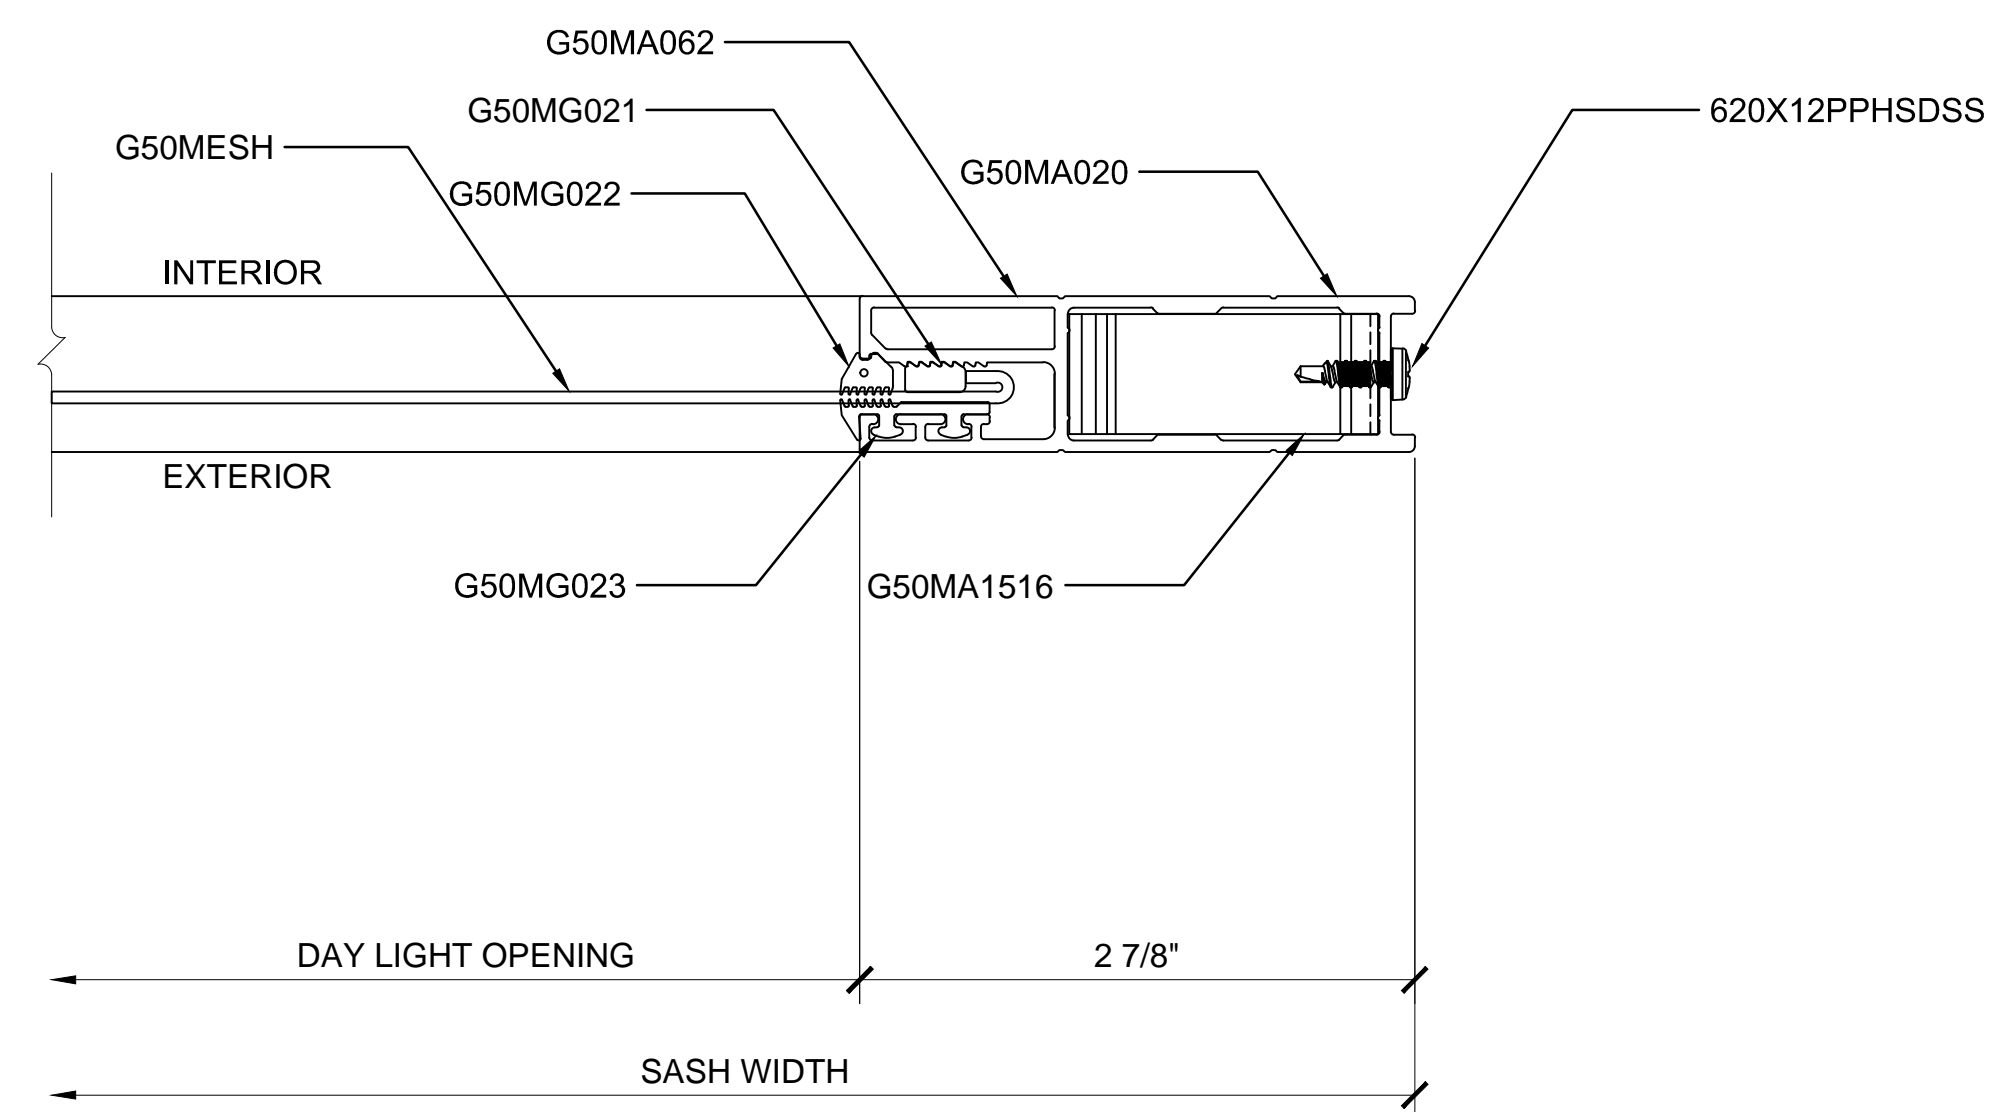

② SECTION DETAIL AT JAMB

ARCH REF: N/A

1'-0"=1'-0"

